



# Access to Sanibel Island Emergency Repairs – Post Hurricane Ian

October 3, 2022



# Access to Sanibel Island



## 3 Causeways


- Mainland Causeway
- Causeway A-B
- Causeway B-C

## 3 Bridges

- 124116 – Sanibel A
- 124115 – Sanibel B
- 124114 – Sanibel C



# Causeway from Mainland

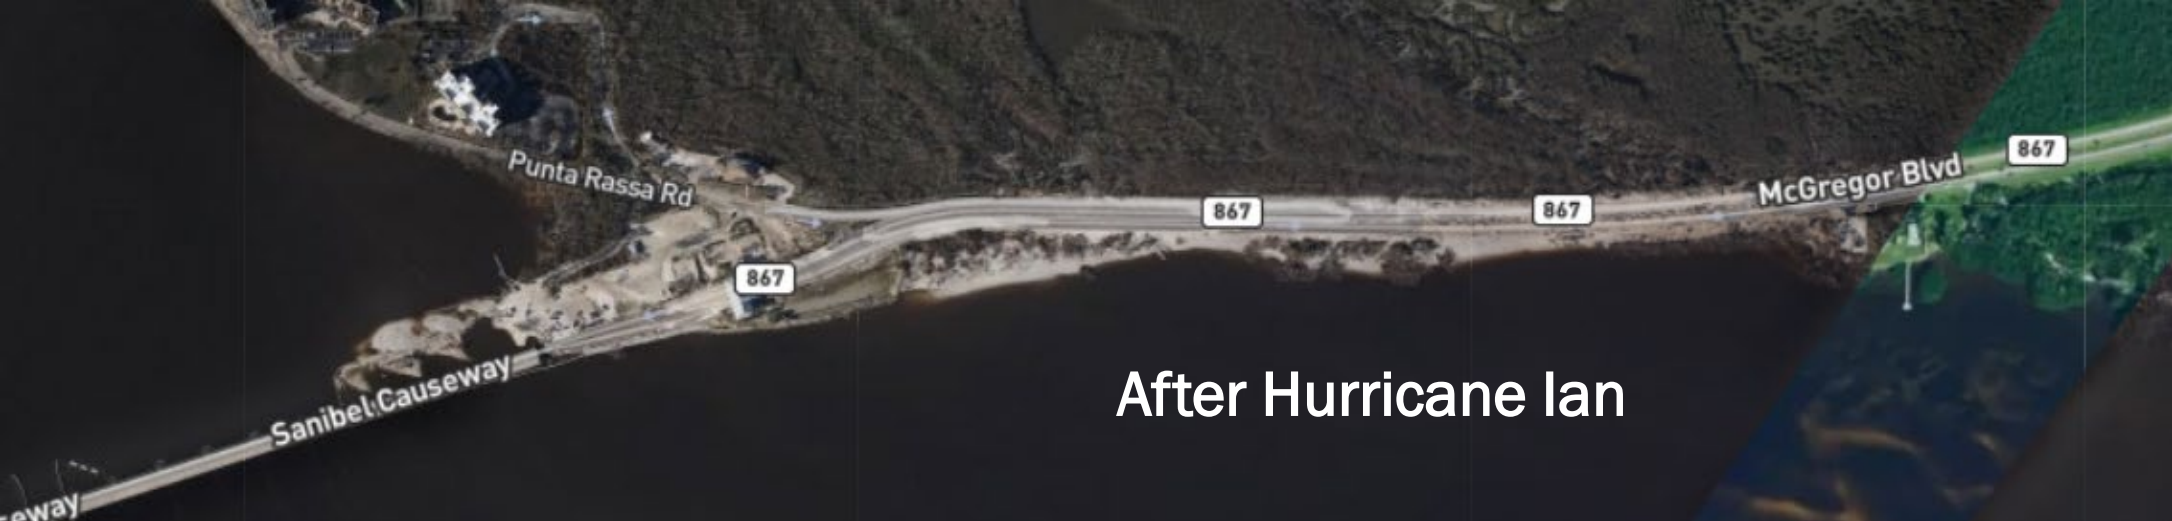

# Causeway from Mainland



# Causeway A-B




Before Hurricane Ian



After Hurricane Ian



# Causeway A-B

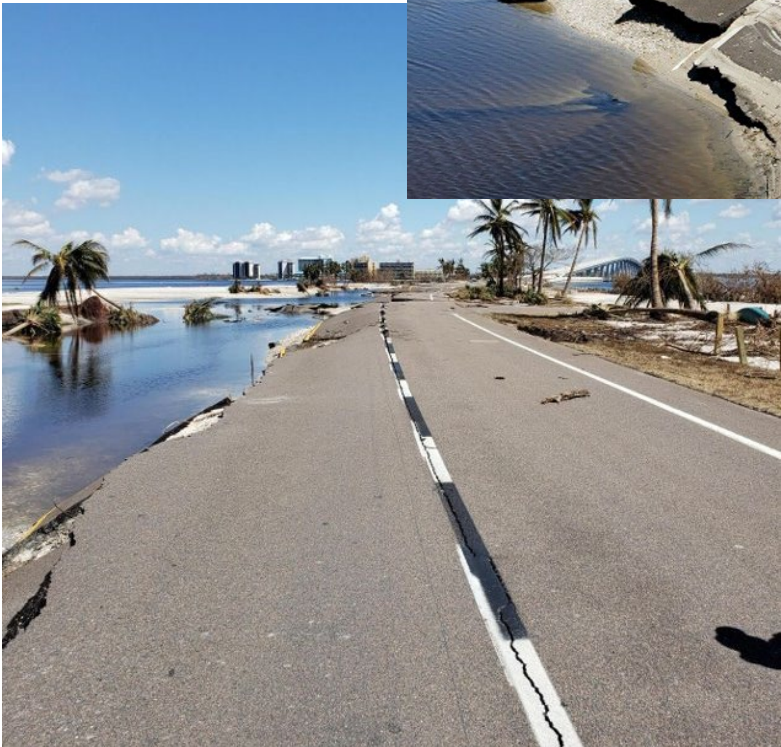

# Causeway B-C



Before Hurricane Ian



After Hurricane Ian



# Causeway B-C





### Anticipated Scope of Work:

- Clearing of debris as needed to install temporary repairs
- Rebuild stable roadbed for acceptable driving surface
- Stabilize (rebuild) approach slabs to bridges
- Provide two-lane access from Fort Myers (mainland) to Sanibel Island.

**Initial Estimated Cost: \$20-40 Million**

**Estimated Time: 25 Days (October 29<sup>th</sup>)**

### Anticipated Scope of Work:

- Build the roadway to standards and specifications
- Building permanent bridge approaches
- Restore drainage, lighting, pavement markings and provide access for utility service along the causeways

**Initial Estimated Cost: \$25- \$30 Million**

**Estimated Time: 1 year**

# Access to Sanibel Island - Timeline



- 10/2/22 – Field assessments complete (to accessible areas)
- 10/2/22 – Coordination FDOT, FHWA, and regulatory agencies regarding Phased Design Build procurement
- 10/2/22 – Coordination with Lee County and FHWA regarding 129 MOA for tolled facilities
- 10/2/22 – Emergency with Contracting Industry regarding Phased Design Build, 7:30PM
- 10/2/22 – Phased Design-Build Advertisement 8PM
- 10/3/22 – Coordination meeting with Lee County regarding temporary construction options
- 10/3/22 – Anticipated 404 Permit Submittal to ACOE
- 10/4/22 – Letters of Response Due to FDOT, Phased Design-Build Contractor Selection
- 10/5/22 – *Anticipated TWO issues to contractor, contractor mobilization*
- 10/29/22 – *Commitment to public for emergency access*
- *October 2023 – Commitment to public for permanent reconstruction to be complete*

*\*Italicized dates are anticipated future dates and may be subject to change*



# Discussion

October 3, 2022

