Southwest Florida
Florida Department of Transportation

SR 33 (Lakeland Hills Blvd.) from Parkview Place to North of Granada Street 440444-1

Project Details	
Phase	Construction
Limits	SR 33 (Lakeland Hills Blvd.) from Parkview Place to north of Granada Street
Project Start	Late 2024
Length	1.13 miles
City	Lakeland
County	Polk
Road	SR 33
Construction Cost	$27.6 million
Estimated Completion	Early 2027

Contact Information

Communications Team
Sandra Mancil
863-519-4116
Sandra.Mancil@dot.state.fl.us

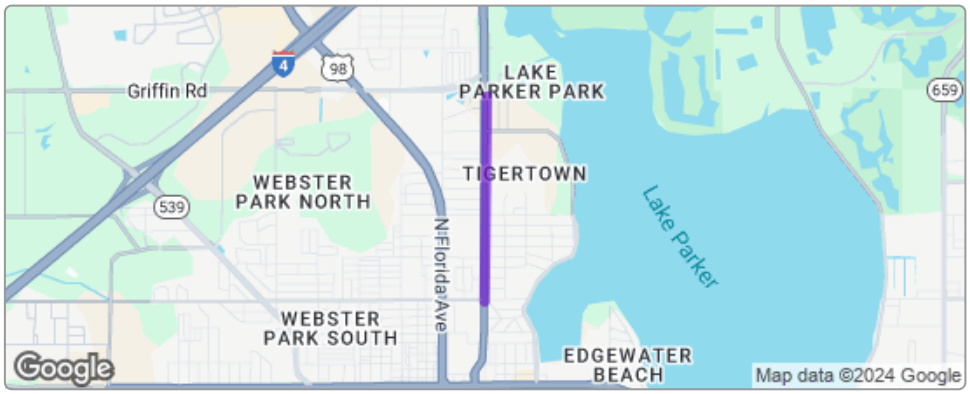

About

The Florida Department of Transportation (FDOT), District One, began improvements to State Road SR 33 (Lakeland Hills Boulevard) in Polk County in October 2024. This Complete Streets project entails complete reconstruction of the roadway and drainage system from Parkview Place to north of Granada Street in Lakeland.

The new roadway includes four travel lanes with curb and gutter on the outside and a 12-foot raised median from Parkview Place to north of Miami Street. The roadway from north of Miami Street to north of Granada Street will maintain four travel lanes with a continuous 12-foot-wide bi-directional left turn lane. Additional safety enhancements include:

- Constructing a mid-block pedestrian crossing with Rectangular Rapid Flashing Beacon (RRFB) south of Channing Road
- Constructing a mid-block pedestrian crossing with Pedestrian Hybrid Beacon (PHB) north of Swannanoa Street
- Replacing existing 5-foot sidewalks with 8-foot sidewalks
- Modifying existing driveways to reflect current standards
- Upgrading Americans with Disabilities Act (ADA) ramps and pedestrian signals
- Upgrading existing lighting at signalized intersections
- Providing street lighting on both sides of the roadway between Parkview Place and Granada Street
- Storm sewer system replacement
- Upgrading traffic signal equipment to LED